

Rack & Pinion Jack 1624




Rack & pinion jack for easy and secure lifting lowering, adjusting, etc. of all kinds of charges.
self-locking security crank, keeps the charge in every required position
easy and effective operation through optimal gear ratio
for pulling or pushing
load: 1,5 - 10 t
special versions on request:

- different length of rack
- different lift
- drive shaft to connect several jacks
- with internal brake and removable crank

Technische Daten

Technical data

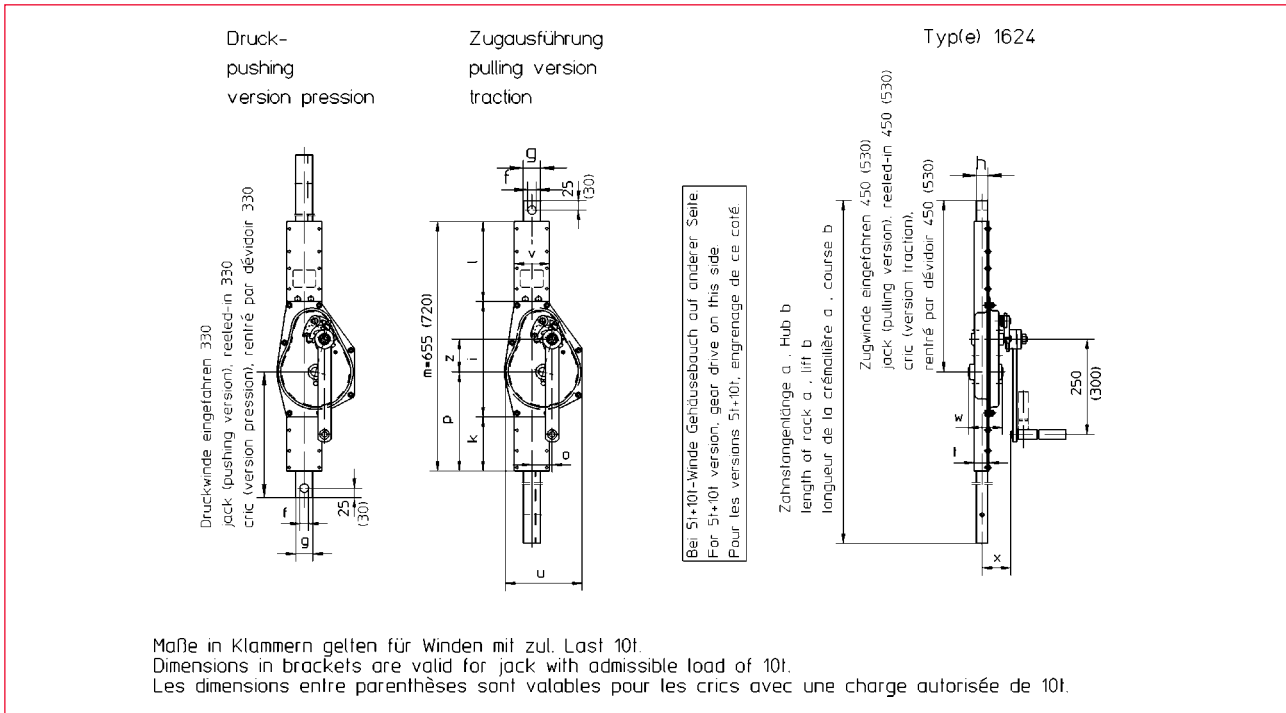

Bestell-Nr. Order N° N° Code	zulässige Last admissible load charge autorisée	Ausführung version version	Zahnstangenlänge (a) rack length longueur de la crémaillère	Hub (b) lift course
205 186	1,5 t	Zugausführung / pulling version / version traction	1350 mm	800 mm
205 187	1,5 t	Zugausführung / pulling version / version traction	1805 mm	1250 mm
205 188	1,5 t	Zugausführung / pulling version / version traction	2055 mm	1500 mm
205 189	1,5 t	Zugausführung / pulling version / version traction	2355 mm	1800 mm
205 285	1,5 t	Druckausführung / pushing version / version pression	950 mm	400 mm
205 190	1,5 t	Druckausführung / pushing version / version pression	1350 mm	800 mm
205 192	1,5 t	Druckausführung / pushing version / version pression	1805 mm	1250 mm
205 193	1 t	Druckausführung / pushing version / version pression	2055 mm	1500 mm
205 194	0,75 t	Druckausführung / pushing version / version pression	2355 mm	1800 mm
205 203	3 t	Zugausführung / pulling version / version traction	1350 mm	800 mm
205 204	3 t	Zugausführung / pulling version / version traction	1800 mm	1250 mm
205 205	3 t	Zugausführung / pulling version / version traction	2350 mm	1800 mm
205 286	3 t	Druckausführung / pushing version / version pression	950 mm	400 mm
205 206	3 t	Druckausführung / pushing version / version pression	1350 mm	800 mm
205 207	2,5 t	Druckausführung / pushing version / version pression	1800 mm	1250 mm
205 208	1 t	Druckausführung / pushing version / version pression	2350 mm	1800 mm
205 215	5 t	Zugausführung / pulling version / version traction	1405 mm	800 mm
205 216	5 t	Zugausführung / pulling version / version traction	2400 mm	1800 mm
205 287	5 t	Druckausführung / pushing version / version pression	1000 mm	400 mm
205 217	5 t	Druckausführung / pushing version / version pression	1405 mm	800 mm
205 218	3 t	Druckausführung / pushing version / version pression	2400 mm	1800 mm
200 065	10 t	Zugausführung / pulling version / version traction	1450 mm	800 mm
200 066	10 t	Druckausführung / pushing version / version pression	1450 mm	800 mm

zulässige Last admissible load charge autorisée	Maßtabell mm table of dimensions tableau de dimensions													
	f	g	h	i	k	l	o	p	t	u	v	w	x	z
1,5 t	20,5	35	25	195	200	260	43,5	270	33,5	125	78	78	67	42,5
3 t	22,5	45	30	303	142	210	53	260	39,5	204	89	89	77	86
5 t	26	50	40	308	163	184	69,5	260	51	189	104	104	88	109
10 t	31	60	50	396	125	199	49	255	62,5	250	132	132	104	150,5

We reserve the right to amend specifications without notice or obligation.